# WiFi & RF 5 in 1 LED Controller

# Model No.: WT5

Tuya APP cloud control/Voice control/5 Channels/1-5 color/DC power socket input/Wireless remote control

### **Features**

- 5 in 1 function, used for control RGB, RGBW, RGB+CCT, color temperature or single color LED strip.
- DC power socket input and 5 channel constant voltage output.
- Tuya APP cloud control, support on/off, RGB color, color temperature and brightness adjust, delay turn on/off light, timer run, scene edit and music play function.
- Voice control, support amazon ECHO and TmallGenie smart speaker.
- Match with RF 2.4G remote control optional.
- User need set light type by press key before Tuya APP network connection and match RF remote of the same light type.
- Each WT5 controller can also work as WiFi-RF converter, then use Tuya APP to control one or more RF LED controller or RF LED dimming driver synchronously.
- Light on/off fade time 3s selectable.



Safety and EMC

EMC standard (EMC)

### FC C (E RoHS emc LVD RED

ETSI EN 301 489-1 V2.2.3

ETSI EN 301 489-17 V3.2.4


### **Technical Parameters**


| Input and Output |                    |  |  |  |
|------------------|--------------------|--|--|--|
| Input voltage    | 12-24VDC           |  |  |  |
| Input current    | 15.5A              |  |  |  |
| Output voltage   | 5 x (12-24)VDC     |  |  |  |
| Output current   | 5CH,3A/CH          |  |  |  |
| Output power     | 5 x (36-72)W       |  |  |  |
| Output type      | Constant voltage   |  |  |  |
| Package          |                    |  |  |  |
| Size             | L120 x W43 x H35mm |  |  |  |
| Gross weight     | 0.055kg            |  |  |  |

| Dimming data            |                         |  |  |  |
|-------------------------|-------------------------|--|--|--|
| Input signal            | Tuya APP + RF 2.4GHz    |  |  |  |
| Control distance        | 30m(Barrier-free space) |  |  |  |
| Dimming gray scale      | 4096 (2^12) levels      |  |  |  |
| Dimming range           | O -100%                 |  |  |  |
| Dimming curve           | Logarithmic             |  |  |  |
| PWM frequency           | 1 000Hz (default)       |  |  |  |
| Environment             |                         |  |  |  |
| Operation temperature   | Ta: -30 °C ~ +55 °C     |  |  |  |
| Case temperature (Max.) | T c:+85 °C              |  |  |  |


| Safety standard(LVD)    | EN 62368-1:2020+A11:2020   |  |  |  |
|-------------------------|----------------------------|--|--|--|
| Radio Equipment(RED)    | ETSI EN 300 328 V2.2.2     |  |  |  |
| Certification           | CE,EMC,LVD,RED             |  |  |  |
| Warranty and Protection |                            |  |  |  |
| Warranty                | 5 years                    |  |  |  |
| Protection              | Reverse polarity Over-heat |  |  |  |

### Mechanical Structures and Installations

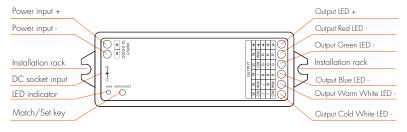



### System wiring

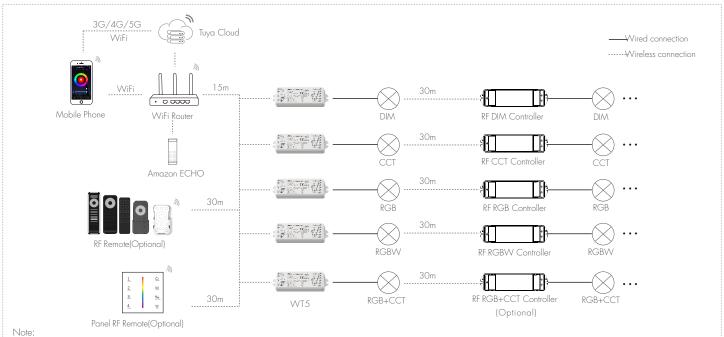


Please check if the WiFi router net in 2.4G band, the 5G band is not available, and do not hide your router network.
 Please keep the distance between WT5 devices and router close, and check the WiFi signals.

1. The above distance is measured in spacious (no obstacle) environment, Please refer to the actual test distance before installation.

User Manual Ver 1.0.5


## Wiring Diagram

### • For RGB+CCT




Press and hold match/set key for 16s, until the RUN LED indicator turn blue, then release, the controller will become RGB+CCT type, then do smart config by tuya APP, or short press match key to match with RGB+CCT RF remote.

### • For RGBW




Press and hold match/set key for 14s, until the RUN LED indicator turn green, then release, the controller will become RGBW type, then do smart config by tuya APP, or short press match key to match with RGBW RF remote.

### • For RGB



Press and hold match/set key for 12s, until the RUN LED indicator turn red, then release, the controller will become RGB type, then do smart config by tuya APP, or short press match key to match with RGB RF remote.

### • For dual color CCT



Press and hold match/set key for 10s, until the RUN LED indicator turn yellow, then release, the controller will become CCT type, then do smart config by tuya APP, or short press match key to match with CCT RF remote.

### • For single color



Press and hold match/set key for 8s, until the RUN LED indicator turn white, then release, the controller will become DIM type, then do smart config by tuya APP, or short press match key to match with dimming RF remote.

#### Note:

- 1. User can connect constant voltage power supply or power adapter as power input.
- 2. Press and hold Match/Set key for 2s, switch 5 kinds light type in sequence.
- 3. For RGB+CCT or CCT light type, continuous power on and off will change 3 levels color temperature (WW, NW and CW) in sequence.
- 4. Switch off the power, then switch on power, repeat again.

  Immediately short press match key 3 times, the light on/off time will change between 3s and 0.5s.

User Manual Ver 1.0.5

## Tuya APP network connection

Push twice Match/Set key fastly, or when press and hold Match/Set key for 8-16s to set 5 kinds light type: Clear previous network connection, enter Smart config mode, the purple LED indicator flash fastly, the output LED will flash 10 times.

Press and hold Match/Set key for 2s:

Switch 5 kinds light type in sequence, notice this operation does not automatically clear previous network connection.

Press and hold Match/Set key for 5s:

Clear previous network connection, enter AP config mode, the purple LED indicator flash slowly. If smart config failed, please try AP config.

Repeat power on and off for 5 consecutive times, also clear previous network connection, enter Smart config mode, the output LED will flash 10 times.

If Tuya APP network connection succeed, the RUN LED indicator will stop flash purple, and turn corresponding light type color (White: DIM, Yellow: CCT, Red: RGB, Green: RGBW, Blue: RGB+CCT). and in Tuya APP, you can find RGB+CCT device (or other DIM, CCT, RGB or RGBW).

# Tuya APP interface



### White interface

For DIM type:

Touch brightness slide to adjust brightness.

For RGB type:

Touch brightness slide, get RGB mixed white firstly, then to adjust white brightness.

For RGBW type:

Touch brightness slide, adjust white channel brightness.



### Color temperature interface

For CCT type:

Touch color wheel to adjust color temperature. Touch brightness slide to adjust brightness.

For RGB+CCT type:

Touch color wheel to adjust color temperature, RGB will turn off automatically.

Touch brightness slide to adjust white brightness.



#### Colour interface

For RGB or RGBW type:

Touch color wheel to adjust static RGB color. Touch brightness slide to adjust color brightness. Touch saturation slide to adjust color saturation, namely gradient from the current color to white (RGB mixed).

For RGB+CCT type:

Touch color wheel to adjust static RGB color, WW/CW will turn off automatically. Touch brightness slide to adjust color brightness. Touch saturation slide to adjust color saturation, namely gradient from the current color to white (RGB mixed).



#### Scene interface

The 1-4 scene is static color for all light type. the inner color of these scene can be editable.

The 5-8 scene is dynamic mode for RGB, RGBW, RGB+CCT type, such as green fade in and fade out, RGB jump, 6 color jump, 6 color smooth.



### Music, Timer, Schedule

The music play can use smart phone music player or micro-phone as music signal input.

The Timer key can turn on or turn off light in the next  $24\ \text{hours}.$ 

The Schedule key can add multiple timers to turn on or turn off light according to different time periods.

User Manual Ver 1.0.5

# WT5 match remote control (Optional)

End user can choose the suitable match/delete ways. Two options are offered for selection:

### Use the WT5's Match key

#### Match:

Short press match key of WT5,

immediately press on/off key (single zone remote) or zone key (multiple zone remote) on the remote.

The LED indicator fast flash a few times means match is successful.

#### Delete:

Press and hold match key of WT5 for 20s,

The LED indicator fast flash a few times means all matched remotes were deleted.

#### Use Power Restart

#### Match:

Switch off the power of WT5, then switch on power, repeat again. Immediately short press on/off key (single zone remote) or zone key (multiple zone remote) 3 times on the remote.

The light blinks 3 times means match is successful.

#### Delete:

Switch off the power of WT5, then switch on power, repeat again. Immediately short press on/off key (single zone remote) or zone key (multiple zone remote) 5 times on the remote.

The light blinks 5 times means all matched remotes were deleted.

## WT5 work as WiFi-RF converter to match RF LED controller or dimming driver

End user can choose the suitable match/delete ways. Two options are offered for selection:

### Use the controller's Match key

#### Match:

Short press match key of the controller, immediately press on/off key on the Tuya APP.

The LED indicator fast flash a few times means match is successful.

#### Delete:

Press and hold match key of the controller for 5s,

The LED indicator fast flash a few times means match was deleted.

### Use Power Restart

#### Match:

Switch off the power of the controller, then switch on power, repeat again. Immediately short press on/off key 3 times on the Tuya APP. The light blinks 3 times means match is successful.

#### Delete:

Switch off the power of the controller, then switch on power, repeat again. Immediately short press on/off key 5 times on the Tuya APP. The light blinks 5 times means match was deleted.

## Dynamic mode list

### For RGB/RGBW:

| No. | Name                      | No. | Name                  |
|-----|---------------------------|-----|-----------------------|
| 1   | RGB jump                  | 6   | RGB fade in and out   |
| 2   | RGB smooth                | 7   | Red fade in and out   |
| 3   | 6 color jump              | 8   | Green fade in and out |
| 4   | 6 color smooth            | 9   | Blue fade in and out  |
| 5   | Yellow cyan purple smooth | 10  | White fade in and out |

#### For RGB+CCT:

| No. | Name                     | No. | Name                  |
|-----|--------------------------|-----|-----------------------|
| 1   | RGB jump                 | 6   | RGB fade in and out   |
| 2   | RGB smooth               | 7   | Red fade in and out   |
| 3   | 6 color jump             | 8   | Green fade in and out |
| 4   | 6 color smooth           | 9   | Blue fade in and out  |
| 5   | Color temperature smooth | 10  | White fade in and out |

User Manual Ver 1.0.5 — 4