6 Ways DMX Signal Splitter

Model No.: DMA2X3

Input and output optical isolation/Six independent outputs/DWX512-A compatible



CE RoHS emc LVD

Features

- Two DMX512 signal input, repeat 2 x 3 DMX512 signal output, each allowing for 32 DMX devices to be connected.
- Dedicated to amplify, distribute and insulate the signal that comes from the lighting system equipment when it is connected to the bus of DMX512(or RS-485).
- Photo-electricity insulation between input and output terminals, output terminals among channels.
- Input isolated from outputs to 500VAC, 1000VDC.
- Outputs are isolated from each other to 500VAC, 1000VDC.
- Input and outputs are ture RS-485 rated, and no microprocessors are used for maximum reliability.
- 9 LEDs indicate power in, DMX in and DMX output status.

45 mm

Mechanical Structures and Installations

Power input

DMX output A (1)

Installation rack

DMX through A

D+ D- GND

D+ D- GND

DMX-0UT A (1) DMX-0UT A (2) DMX-0UT B (2)

DMX input A

+ -

2 x DNX512 input
2 x DNX512 through

DMX output A (2)

DMA2X3 6 Ways DMX Signal Splitte

DMX output A (3)

DMX input B

888 • 888

D+ D- GND D+ D- GND

DMX output B (1)

DMX through B

0.5-2.0mm²

CE ROHS

DMX output B (2)



LED indicator

LED indicator

DMX output B (3)


DIN Rail Mounting Size: TS-35/7.5 or TS-35/15

Technical Parameters

Input and Output		Safety and EMC		
Input voltage	12-48VDC		EN55032:2015, EN61000-3-2:2014, EN61000-3-2:2013, EN55024 :2010/A1:2015	
Input current	0.5A Max.	EMC standard (EMC)		
Input signal	DMX512 x 2			
Output signal	DMX512 x 6	Safety standard(LVD)	EN 61347-1:2015 EN 61347-2-11:2015	
		Certification	CE,EMC,LVD	
Environment				
Operation temperature	Ta: -30°C ~ +55°C	Warranty and Pro	Warranty and Protection	
Case temperature (Max.)	Tc:+85°C	Warranty	5 years	
IP rating	IP20	Protection	Reverse Polarity	

Wiring Diagram

DMX 512 Mater

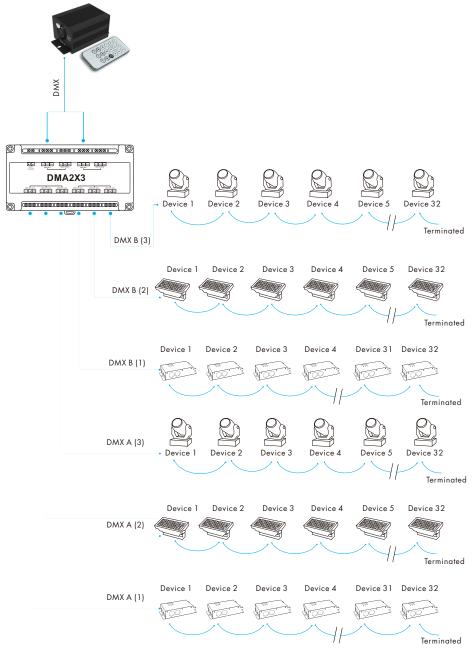

Note:

- A passive loop-through connection allows onward connection to other DMX512 devices. If this feature is not required then the signal must be terminated.
- 2. Each output is capable of driving 32 additional DMX512 devices. It is not necessary to terminate any outputs that are not connected.
- However, a terminator must be connected to the final DMX512 device.
- 3. Connect 0.25W 90-120 Ω terminal resistor for termination.